

CORRECTED VERSION

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number  
**WO 2005/038294 A1**

(51) International Patent Classification<sup>7</sup>: **F16G 1/28**,  
B29D 29/08, B29C 67/24, C08L 15/00, 27/18

(21) International Application Number:  
PCT/EP2004/052559

(22) International Filing Date: 15 October 2004 (15.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
TO2003A 000821 17 October 2003 (17.10.2003) IT

(71) Applicant (for all designated States except US): **DAYCO  
EUROPE S.R.L. CON UNICO SOCIO** [IT/IT]; Via Papa  
Leone XIII, 45, I-66013 CHIETI SCALO (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **DI MECO, Marco**

[IT/IT]; Via Strada Vecchia Fontanelle, 83, I-65129  
PESCARA (IT). **DI GIACOMO, Tommaso** [IT/IT]; Via  
Gamberale, 25, I-66010 S. MARTINO SULLA MAR-  
RUCINA (IT).


(74) Agents: **JORIO, Paolo** et al.; STUDIO TORTA S.r.l., Via  
Viotti, 9, I-10121 TORINO (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

[Continued on next page]

(54) Title: A TOOTHED BELT

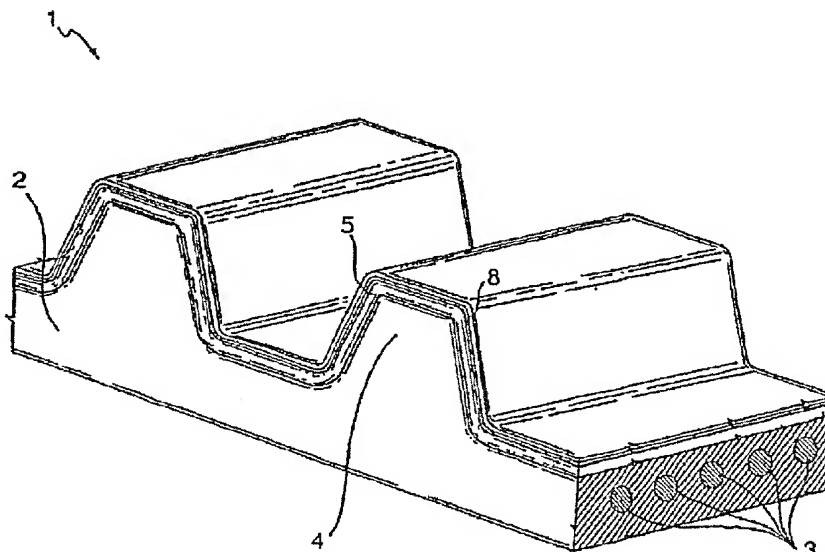

(57) Abstract: Described herein is a toothed belt (1) comprising a body (2) made of elastomeric material, in which there is embedded a plurality of longitudinal filiform resistant inserts or cords (3), and a toothing (4) coated with a coating fabric (5); on top of the coating fabric (5) there is made to adhere a resistant layer (8), which increases resistance to wear of the toothed belt and comprises a fluorine-based plastomer with addition of elastomeric material, in which the plastomer is present in a larger amount than is the elastomeric material and in which the majority of the particles constituting the fluorine-based plastomer have a size less than 10 µm. The resistant layer (8) is applied directly on the fabric (5) via spreading. The fluorinated plastomer preferably has a base of polytetrafluoroethylene compound.

WO 2005/038294 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

**(48) Date of publication of this corrected version:**

6 October 2005

**(15) Information about Correction:**

see PCT Gazette No. 40/2005 of 6 October 2005, Section II

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- 1 -

## A TOOTHED BELT

TECHNICAL FIELD

The present invention relates to a toothed belt and, in particular, to a coating layer for a fabric for toothed belts.

BACKGROUND ART

A toothed belt is known comprising a body made of elastomeric material, embedded in which is a plurality of longitudinal filiform resistant inserts, also referred to as "cords", and a plurality of teeth coated with a coating fabric.

Each component of the belt contributes to increasing the performance in terms of mechanical resistance so as to decrease the risk of failure of the belt and increase the specific transmissible power.

The coating fabric of the belts increases the resistance to abrasion and hence protects the working surface of the belt from wear due to rubbing between the sides and the slanting surfaces of the teeth of the belt and the sides and the bottom lands of the races of the pulley with which the belt interacts.

Furthermore, the coating fabric reduces the coefficient of friction on the working surface and reduces the deformability of the teeth, thus preventing failure.

The coating fabric used may be constituted by a single layer or, alternatively, may be double-layered so as to guarantee greater sturdiness and stiffness.

The fabric is normally treated with an adhesive, for

- 2 -

example resorcinol and formaldehyde lattice (RFL) to increase adherence between the body and the fabric itself.

5 There are moreover employed a number of methods for increasing resistance to wear of drive belts by modifying the structure of the coating fabric or performing different treatments on the fabric, for example, treatments of the fabric with halogenated  
10 polymers.

Said treatments do not, however, lead to any great increase in resistance to wear in so far as the coating fabric of the toothed belt, in use, constitutes in any  
15 case the working surface.

To overcome the above problem, the patent EP1157813 filed in the name of the present applicant proposed coating the coating fabric with a resistant layer  
20 comprising a fluorinated plastomer, an elastomeric material, and a vulcanizing agent. The fluorinated plastomer is present in the resistant layer in an amount greater than that of the elastomeric material.

25 The use of said resistant layer has enabled excellent results in terms of increase in resistance to wear to be obtained.

The resistant layer is formed via the use of a  
30 fluorinated plastomer comprising particles which have an average size of 20  $\mu\text{m}$  or more and are in the form of agglomerates. Consequently, said agglomerates have sizes such as to entail a difficult mixability in solution with the elastomer. The agglomerates are hence also  
35 present in the final resistant layer that is

- 3 -

consequently non-homogeneous, and said lack of homogeneity can generate a high level of noise.

Research has hence been carried out into solutions that will enable, together with a high resistance to wear, also an improved and lower level of noise during operation of the toothed belt to be achieved.

#### DISCLOSURE OF INVENTION

The purpose of the present invention is hence to provide a toothed belt which will present a high resistance to wear and, at the same time, will enable a low noise level during operation at both high and low running rates to be obtained.

According to the present invention, the above purpose is achieved with a toothed belt according to Claim 1.

According to the present invention, there is moreover provided a process according to Claim 7.

#### BRIEF DESCRIPTION OF THE DRAWING

For a better understanding of the present invention, a description thereof is provided in what follows also with reference to the attached figure, which is a partial perspective view of a toothed belt according to the present invention.

#### BEST MODE FOR CARRYING OUT THE INVENTION

In the figure, designated as a whole by 1 is a toothed belt. The belt 1 comprises a body 2 made of elastomeric material, embedded in which is a plurality of longitudinal filiform resistant inserts or cords 3.

The body 2 has a toothing 4, which is coated with a

- 4 -

coating fabric 5.

The body 2 comprises a mix made of elastomeric material possibly reinforced with fibre and comprising a main elastomer preferably chosen in the group consisting of acrylonitrile/butadiene, hydrogenated acrylonitrile/butadiene, polyethylene chlorosulphonate, EPDM, and chloroprene.

Even more preferably, the main elastomer is hydrogenated acrylonitrile/butadiene.

The mix made of elastomeric material may contain, in addition to the main elastomer, also other elastomers and, moreover, conventional additives, for example reinforcing agents, fillers, pigments, stearic acid, accelerators, vulcanizing agents, antioxidants, activators, initiators, plastifiers, waxes, pre-vulcanizing inhibitors, and the like. For example, as filler there can be employed carbon black or white filler, which is generally added in amounts comprised between 5 and 200 phr, preferably approximately 70 phr. There can also be added talcum powder, calcium carbonate, silica, and the like, in amounts generally comprised between 5 and 150 phr, or dispersions in oil containing fillers. There may be used organosilanes in amounts comprised between 0.1 and 20 phr. There can be used as vulcanizing agents sulphur donors, for example, amino disulphides and polymeric polysulphides, or free sulphur, or organic and inorganic peroxides. The amount added varies according to the type of rubber and the type of vulcanizing agent employed and is generally comprised between 0.1 and 10 phr. Amongst the antidegradants most widely used in the composition of the mix there are microcrystalline waxes, paraffin

- 5 -

waxes, monophenols, bisphenols, thiophenols, polyphenols, derivatives of hydroquinone, phosphites, mixtures of phosphates, thioesters, naphthyl amines, diphenol amines, substituted and non-substituted derivatives of diaryl amines, diaryl phenylene diamines, paraphenylene diamines, quinolines, and mixtures of amines. The antidegradants are generally employed in amounts comprised between 0.1 and 10 phr. Examples representing process oils that can be used are dithiobisbenzanylide, polyparadinitrosobenzene, xylyl mercaptans, polyethylene glycol, paraffin oils, vulcanized vegetable oils, phenolic resins, synthetic oils, paraffin resins, and polymeric esters. Process oils can be used in conventional amounts of between 0 and 140 phr. Amongst the initiators, there is conventionally used stearic acid in an amount comprised between 1 and 4 phr. There can moreover be added conventional additives, such as calcium oxide, zinc oxide and magnesium oxide, generally in amounts comprised between 0.1 and 25 phr. There are also employed conventional accelerating agents or combinations of accelerating agents, such as amines, disulphides, guanidine, thiourea, thiazoles, thiols, sulphenamides, dithiocarbamates, and xanthates generally in amounts comprised between 0.1 and 100 phr.

The resistant inserts or cords 3 are, for example, made of highly resistant glass fibres, but can also be aramidic fibres or fibres with high modulus, for example PBO.

The coating fabric 5 of the toothed belt 1 may be formed by one or more layers and may for example be obtained by means of the textile techniques known as 2x2 twill.

- 6 -

Alternatively, the coating fabric 5 may be obtained according to textile techniques that will enable at least one rough surface to be obtained for improving mechanical adhesion.

5

The fabric 5 is preferably constituted by a polymeric material, preferably aliphatic or aromatic polyamide, even more preferably, 6/6 polyamide with high thermal resistance and high toughness.

10

The fabric 5 can also be of the type in which each weft thread is constituted by an elastic thread as core and by at least one composite thread wound on the elastic thread, where the composite thread comprises a thread with high thermal and mechanical resistance and at least one coating thread wound on the thread with high thermal and mechanical resistance.

A toothed belt 1 according to the present invention further comprises a resistant layer 8 arranged on the outside of the fabric 5. The resistant layer 8 is constituted by a fluorinated plastomer with the addition of an elastomeric material, and the fluorinated plastomer is present in an amount by weight greater than that of the elastomeric material.

According to the present invention, the fluorinated plastomer is formed prevalently, i.e., for more than 50%, by particles having average dimensions smaller than 10  $\mu\text{m}$ , preferably having a size of between 5 and 9  $\mu\text{m}$ .

Said particles, in contrast to the known art, do not form agglomerates of dimensions equal to the known ones, but rather have much smaller dimensions, for example 6  $\mu\text{m}$ .



- 7 -

Preferably, the fluorinated plastomer is a polytetrafluoroethylene-based compound; for example DYNEON TF9201 may be used.

- 5 Preferably, the elastomeric material with which the fluorinated plastomer is mixed to form the resistant layer 8 is HNBR; even more preferably, it is an HNBR modified with a zinc salt of polymethacrylic acid, for example ZEOFORTE ZSC (Nippon Zeon, registered trademark)  
10 may be used.

Furthermore, preferably, the coating fabric 5 is in direct contact with the resistant layer 8, and hence no adhesive material is set between them.

- 15 According to the known art described in the patent EP1157813, set between the fabric and the resistant layer is an adhesive material for improving adhesion of the resistant layer 8 on the fabric 5.

20 Unlike what occurs according to the known art, in the present invention, the resistant layer 8 is made to adhere directly to the fabric 5.

- 25 Preferably, in order to ensure the necessary resistance, the resistant layer 8 has a weight of between 50 and 80 g/m<sup>2</sup>, which is equivalent to an average thickness of between 30 and 50 µm.

- 30 Preferably, the fluorinated plastomer is present in an amount comprised between 101 and 150 by weight per 100 parts of elastomeric material.

The resistant layer 8 further comprises a peroxide as  
35 vulcanizing agent. The peroxide is added normally in an

- 8 -

amount comprised between 1 and 15 parts by weight per 100 parts of elastomeric material.

5 The resistant layer 8 is applied directly on the fabric 5, preferably via spreading on the fabric 5 itself.

10 Next, the toothed belt 1 is vulcanized according to commonly applied and known methods, which consequently do not call for any detailed description herein.

From an examination of the characteristics of the toothed belt made according to the present invention, the advantages that it enables are evident.

15 In particular, it has surprisingly been found that, when a coating fabric 5 of a toothed belt is coated with a resistant layer 8 of the same type as the one previously described, the resistance to wear of the toothed belt is excellent, and, at the same time, during operation, the  
20 toothed belt has a low noise level at both high and low rates of operation.

In addition, the new formulation of the fluorinated plastomer presents an excellent resistance to the  
25 abrasion typical of fluorinated-based additives, together with excellent mechanical characteristics of the elastomeric materials, and is able to adhere to the fabric 5 without the use of any adhesive.

30 The fact that the use of adhesives is avoided also enables advantageously elimination of a step during the process of fabrication of the belt 1, thus achieving considerable savings in terms of times and costs.

35 Furthermore, thanks to the improved properties of the

- 9 -

resistant layer 8 according to the present invention and, in particular, of the fluorinated plastomer, a smaller amount of costly fluorinated material is used, and a thinner resistant layer 8 is applied, albeit  
5 maintaining intact the mechanical characteristics and the characteristics of resistance to wear.

Finally, the application via spreading further enables a resistant layer 8 of uniform thickness to be easily  
10 obtained.

The toothed belt according to the present invention will now be described also by means examples, which are not, however, to be understood as in any way limiting the  
15 scope of the invention.

#### EXAMPLE 1

Appearing in Table 1 are the characteristics of a fluorinated plastomer that can be used in a resistant  
20 layer 8 according to the present invention.

Table 1

DYNEON TF9201	
Mean density ASTM D 1457	
Melting temperature ASTM D 1457	
Size distribution of the particles (Microtac Laser)	On average 6 $\mu$ m
Specific surface area (Absorption of nitrogen)	11

#### EXAMPLE 2

25 Appearing in Table 2 are the characteristics of an elastomeric material in a resistant layer 8 according to the present invention.

- 10 -

Table 2

ZETPOL 2010	
Bound acrylonitrile wt%	36
Mooney viscosity MS 1+4 ml 100°C	85
Specific gravity	0.98 (g/cm <sup>3</sup> )

## EXAMPLE 3

Appearing in Table 3 is the chemical composition of a  
5 resistant layer 8 made according to the present  
invention. Said resistant layer has a thickness of 0.037  
mm.

Table 3

Elastomeric material as per Example 2	100 phr
Fluoropolymer-based additive as per Example 1	125 phr
Peroxide	6 phr

10

- 11 -

## C L A I M S


1. A toothed belt (1), comprising a body (2) and a plurality of teeth (4); said teeth being coated with a fabric (5); said fabric (5) being coated on the outside  
5 with a resistant layer (8); said resistant layer (8) comprising a fluorinated plastomer, an elastomeric material and a vulcanizing agent; said fluorinated plastomer being present in said resistant layer (8) in an amount higher than that of said elastomeric material;  
10 said toothed belt being characterized in that said fluorinated plastomer is formed mainly by particles of average size smaller than 10  $\mu\text{m}$ , and in that said resistant layer (8) is made to adhere directly to said fabric.
- 15 2. The toothed belt according to Claim 1, characterized in that said fluorinated plastomer is polytetrafluoroethylene.
- 20 3. The toothed belt according to Claim 1 or coated by 2, characterized in that said second elastomeric material comprises HNBR.
- 25 4. The toothed belt according to Claim 3, characterized in that said second elastomeric material comprises HNBR modified with a zinc salt of polymethacrylic acid.
- 30 5. The toothed belt according to any one of the preceding claims, characterized in that said resistant layer (8) comprises said fluorinated plastomer in an amount by weight of between 101 and 150 parts by weight with respect to said elastomeric material.
- 35 6. The toothed belt according to Claim 5, characterized in that said resistant layer (8) has a weight of between

- 12 -

50 and 80 g/m<sup>2</sup>.

7. A process for fabrication of a toothed belt according to any one of Claims 1 to 6, characterized in that said  
5 resistant layer (8) is applied directly on said fabric (5) via spreading.

1 / 1

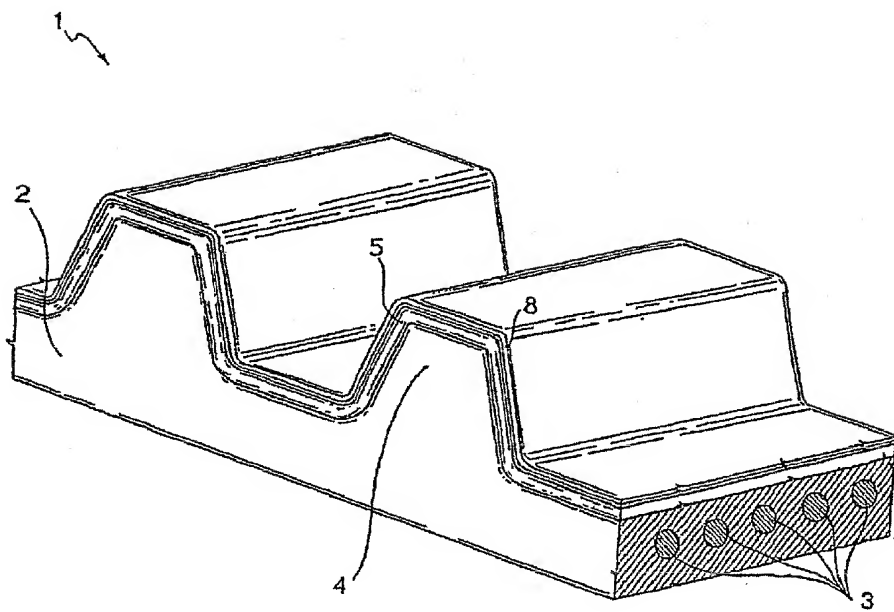

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/EP2004/052559

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16G1/28 B29D29/08 B29C67/24 C08L15/00 C08L27/18

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16G B29D B29C C08L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 1 052 425 A (MITSUBOSHI BELTING LTD) 15 November 2000 (2000-11-15)	1-3, 7
Y	paragraphs '0053!', '0053!', '0063!; figure 2; example C5	4-6
Y	EP 1 157 813 A (DAYCO EUROP SRL) 28 November 2001 (2001-11-28) cited in the application paragraphs '0025! - '0039!; claims 1,2	4-6
P, A	EP 1 396 658 A (CONTITECH ANTRIEBSSYSTEME GMBH) 10 March 2004 (2004-03-10) paragraphs '0019!, '0035!; claim 6	1, 7
A	US 6 352 488 B1 (MORRIS MATTHEW THOMAS ET AL) 5 March 2002 (2002-03-05) paragraph '0032! - paragraph '0038!	1-7
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

22 February 2005

Date of mailing of the international search report

02/03/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Van Nieuwenhuize, O



## INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP2004/052559

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 196 249 A (PATRICHI MIHAI D) 1 April 1980 (1980-04-01) column 2, line 15 - line 28	1,7
A	US 5 238 991 A (MAGNUS FREDRICK L ET AL) 24 August 1993 (1993-08-24) claims 1,2	1
A	US 6 153 686 A (MORRIS MATTHEW THOMAS ET AL) 28 November 2000 (2000-11-28) claim 1	1
A	US 3 600 309 A (JONES THOMAS ET AL) 17 August 1971 (1971-08-17) claim 1	1
A	EP 0 711 643 A (GOODYEAR TIRE & RUBBER) 15 May 1996 (1996-05-15) page 3, line 16	1
A	WO 01/75330 A (NAU JOACHIM ; WOLTERS JOERG (DE); GREYDANUS YMTE (DE); MOSES REINHOLD) 11 October 2001 (2001-10-11) page 7, paragraph 2	1
A	US 6 013 218 A (PATITSAS GEORGE PHILEMON ET AL) 11 January 2000 (2000-01-11) column 3, line 35	1
A	WO 00/63580 A (THE GATES CORPORATION; GIBSON, DANIEL, PATTIE; MACKINTOSH, JAMES, GORD) 26 October 2000 (2000-10-26) table 1	1

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/EP2004/052559

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1052425	A	15-11-2000	JP 2001032887 A DE 60008039 D1 DE 60008039 T2 EP 1052425 A2	06-02-2001 11-03-2004 25-11-2004 15-11-2000
EP 1157813	A	28-11-2001	IT T020000468 A1 AT 235367 T BR 0102792 A CA 2348224 A1 DE 60100139 D1 DE 60100139 T2 EP 1157813 A1 ES 2194810 T3 JP 2002039276 A US 2002015825 A1	23-11-2001 15-04-2003 02-01-2002 23-11-2001 30-04-2003 08-01-2004 28-11-2001 01-12-2003 06-02-2002 07-02-2002
EP 1396658	A	10-03-2004	EP 1396658 A1 BR 0303470 A US 2004048708 A1	10-03-2004 08-09-2004 11-03-2004
US 6352488	B1	05-03-2002	BR 0000982 A CA 2296767 A1 DE 60006174 D1 DE 60006174 T2 EP 1035353 A1	31-10-2000 05-09-2000 04-12-2003 29-07-2004 13-09-2000
US 4196249	A	01-04-1980	US 4195368 A	01-04-1980
US 5238991	A	24-08-1993	NONE	
US 6153686	A	28-11-2000	BR 9800846 A CA 2229629 A1 CN 1197087 A CZ 9800770 A3 DE 69814222 D1 DE 69814222 T2 DK 864607 T3 EP 0864607 A1 ES 2197393 T3 HU 9800544 A2 ID 20047 A JP 10251451 A PL 325267 A1 TW 591074 B US 6460836 B1	28-03-2000 13-09-1998 28-10-1998 16-09-1998 12-06-2003 18-03-2004 01-09-2003 16-09-1998 01-01-2004 28-10-1998 17-09-1998 22-09-1998 14-09-1998 11-06-2004 08-10-2002
US 3600309	A	17-08-1971	GB 1222001 A	10-02-1971
EP 0711643	A	15-05-1996	AT 234182 T BR 9504162 A CA 2138590 A1 DE 69529877 D1 DE 69529877 T2 EP 0711643 A2 JP 8112817 A TR 960246 A2 US 6013218 A US 5728311 A	15-03-2003 06-08-1996 31-03-1996 17-04-2003 13-11-2003 15-05-1996 07-05-1996 21-06-1996 11-01-2000 17-03-1998

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/052559

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0175330	A	11-10-2001	DE 10016351 A1	11-10-2001
			WO 0175330 A1	11-10-2001
			EP 1272777 A1	08-01-2003
			US 2003139242 A1	24-07-2003
US 6013218	A	11-01-2000	US 5728311 A	17-03-1998
			US 5538218 A	23-07-1996
			BR 9700682 A	01-09-1998
			CA 2180797 A1	17-07-1997
			DE 69714620 D1	19-09-2002
			DE 69714620 T2	03-04-2003
			EP 0785056 A2	23-07-1997
			JP 9234744 A	09-09-1997
			AT 234182 T	15-03-2003
			BR 9504162 A	06-08-1996
			CA 2138590 A1	31-03-1996
			DE 69529877 D1	17-04-2003
			DE 69529877 T2	13-11-2003
			EP 0711643 A2	15-05-1996
			JP 8112817 A	07-05-1996
			TR 960246 A2	21-06-1996
			BR 9504116 A	30-07-1996
			CA 2135032 A1	29-03-1996
			CN 1125169 A ,C	26-06-1996
			EP 0711642 A2	15-05-1996
			JP 8109285 A	30-04-1996
			TR 960245 A2	21-06-1996
WO 0063580	A	26-10-2000	GB 2349113 A	25-10-2000
			AT 277306 T	15-10-2004
			AU 745210 B2	14-03-2002
			AU 4482100 A	02-11-2000
			BR 0006067 A	20-03-2001
			CA 2335544 A1	26-10-2000
			CN 1128945 C	26-11-2003
			DE 60013996 D1	28-10-2004
			EP 1088177 A1	04-04-2001
			JP 3547403 B2	28-07-2004
			JP 2002542078 T	10-12-2002
			WO 0063580 A1	26-10-2000
			US 2002179228 A1	05-12-2002
			US 6419775 B1	16-07-2002